

# SUREGRIP®



Shoe Covers

Protecting People, Products and Environments

# Critical Cover® SureGrip® Shoe Covers

# Critical Cover® SureGrip® Shoe Covers

## Multiple Style Options for Maximum Versatility

**Features and Benefits:** Proven in the marketplace, our SureGrip® shoe covers have established themselves as the shoe cover of choice for a wide range of floor surfaces and in many different applications. Combining durability and cleanliness with outstanding anti-skid properties, SureGrip provides you with a blend of unmatched performance and overall value.

Multiple style and packaging options add to the versatility of SureGrip: serged seams for added strength, traction and a snug fit for safety, and a unique conductive shoe cover.

Our Gaylord packaging option (30 individual bags of 300 each per master carton) for select SureGrip shoe covers reduces waste, labor, and purchase orders while increasing your shelf-space and providing a reusable, pallet sized container for your recyclables or other materials.

## Dry Conditions

### Serged Seams


Blue	Size	Thread Colors
SH-X1222-B	Univ.	White
SH-X1223-B	XL	Black
SH-X1224-B	2X	Blue

Non-skid, thread colors for size identification  
150 pair/case

### Gaylord Packaging

Blue	Size	Thread Colors
SH-X1272-B	Univ.	White
SH-X1273-B	XL	Black
SH-X1274-B	2X	Blue

4,500 pair/case




Dimensions	Size	Length (A)	Height (B)	Top Relaxed (C)	Top Stretched (C)
	Univ.	15 1/2"	6 1/4"	4 1/2"	9 1/2"
	XL	17"	6 1/2"	5"	11 1/2"
	2X	18 1/2"	6 3/4"	5 1/2"	12 1/2"

## Conductive

### Conductive

Blue	Size	Thread Colors
SH-12522-B	Univ	White
SH-12523-B	XL	Black

Conductive, serged seams  
150 pair/case




Dimensions	Size	Length (A)	Height (B)	Top (Relaxed) (C)	Top (Stretched) (C)
	Univ	15 1/2"	6 1/4"	4 1/2"	9 1/2"
	XL	17"	6 3/4"	5"	11 1/2"

# Critical Cover® SureGrip® Shoe Covers

## Seam Construction

### Serged Seams


This seam is produced when the threads are interlocked around the material edges for a strong stress-resistant seam.



## Packaging Perfection

### Layered Packaging Design to Prevent Contamination from Entering Your Controlled Environment


- Packaged in a primary bag, carton liner and outer corrugated carton to prevent cross contamination and contamination migration from one environment to another
- All garments are precision folded and stacked within the primary bag to permit efficient storage with or without bins
- Primary bag placed in clear carton liner that is twisted and taped closed
- All open seams on shipping containers are tape-sealed for additional protection from possible contamination
- Four-sided carton labeling allows easy product identification and inventory management




Primary Bag,  
heat-sealed



Carton Liner




Open carton with  
taped down liner




Sealed carton with  
two corner labels

# Critical Cover® SureGrip® Shoe Covers

## Gaylord Packaging

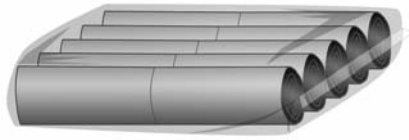

Primary Bag,  
bulk pack, 100 pcs/bag,  
heat-sealed



Secondary Bag,  
1 bag holding 3 Primary bags,  
(30 Secondary bags per Gaylord)  
twisted and taped



Master carton sealed with  
two corner labels

# Critical Cover® SureGrip® Shoe Covers

Material Physical Properties	<i>Standard Applied</i>	<i>Test Method</i>	<i>SureGrip®</i>
	<b>Ball Burst Strength</b>	ASTM D3787	23.7 lbs
	<b>Coefficient of Friction</b>	ASTM D1894 Static Kinetic	0.58 0.63
	<b>General Tensile</b>	ASTM D5034 MD TD	19.86 lbs 22.01 lbs
	<b>Helmke Drum</b>	IEST-RP-CC003.3	Category I
	<b>Hydrostatic Resistance</b>	ASTM D751	NT
	<b>Mass/Unit Area</b>	ASTM D3776	48.5m g/m <sup>2</sup>
	<b>Mullen Burst Strength</b>	ASTM D3786	90 psi
	<b>Puncture Propagation Tear Resistance</b>	ASTM D2582 MD TD	5.0 lbs 4.8 lbs
	<b>Synthetic Blood Penetration</b>	ASTM F1670	NT
	<b>Trapezoid Tearing Strength</b>	ASTM D5587 MD TD	7.02 lbs 6.44 lbs
	<b>Water Resistance Impact Penetration</b>	AATCC Method 42	None Seen
	<b>Water Vapor Transmission</b>	ASTM E96	1.931 gm/day-m <sup>2</sup>

MD - Machine Direction    TD - Transverse Direction    NT - Not Tested

Test results provided by an independent third party testing laboratory.

# Critical Cover® SureGrip® Shoe Covers

WARNING: These garments and associated materials are not suitable for use in some environments containing certain chemicals and/or hazardous agents. It is the responsibility of the user to determine the level of risk in a particular environment and the proper personal protection equipment needed. Garments manufactured from synthetic non-woven material may generate static electricity. Garments that contain an anti-stat treatment are not intended to be used as a safety feature. These garments are not recommended to be used in a flammable and/or explosive environment. If you have any questions, contact your distributor or Alpha Pro Tech for garment/fabric safety data. The use of this product is out of Alpha Pro Tech's control. Therefore, Alpha Pro Tech makes no warranties, expressed or implied, and assumes no liability as to the performance of these products for a particular use. **CAUTION: AVOID HEAT AND/OR OPEN FLAME.**

## UCC Limited Warranty and Exclusions

**Limited Warranty; Disclaimer and Limitation of Remedies:** The products shall be free from defects in material and workmanship. ALPHA PRO TECH HEREBY EXPRESSLY DISCLAIMS ALL WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Buyer's remedy is expressly limited to replacement of any defective product and Alpha Pro Tech shall have no responsibility for any incidental or consequential damages. Any claims under this warranty must be made in writing to Alpha Pro Tech and must be made with 90 days of the purchase.

Alpha Pro Tech, Inc. reserves the right to change any prices, terms and conditions of sale at any time without any notice.

Critical Cover and SureGrip are registered trademarks of Alpha Pro Tech, Inc.

---

---

**Alpha Pro Tech is committed to protecting people,  
products, manufacturing and healthcare environments to  
optimize process effectiveness and customer profitability.**

**Ordering Information:** To place an order, receive a sample or obtain more information,  
please contact our Customer Service Department toll-free from  
8:30 a.m. to 5:00 p.m. Eastern Time at:

Phone: 800-749-1363

Fax: 905-479-8703

E-mail: [sales@alphaprotech.com](mailto:sales@alphaprotech.com)

**International customers please use the following contact information:**

Phone: 520-281-0127 Ext. 201

Fax: 520-281-0235

E-mail: [ccrespo@alphaprotech.com](mailto:ccrespo@alphaprotech.com)

**Visit us at: [www.alphaprotech.com](http://www.alphaprotech.com)**

***Critical Cover***<sup>®</sup>

**AlphaProTech**  
INCORPORATED